



HOMOGENEOUS

VINYL FLOOR COVERINGS

ANTI-STATIC

2025



HOMOGENEOUS
VINYL FLOOR COVERINGS
ANTI-STATIC

PVC FLOORING
SIZE: 2m x 20 m



CODE: 420-613

WIDTH: 2,00


THICKNESS: 2mm



CODE: 440-6620

WIDTH: 2,00


THICKNESS: 2mm

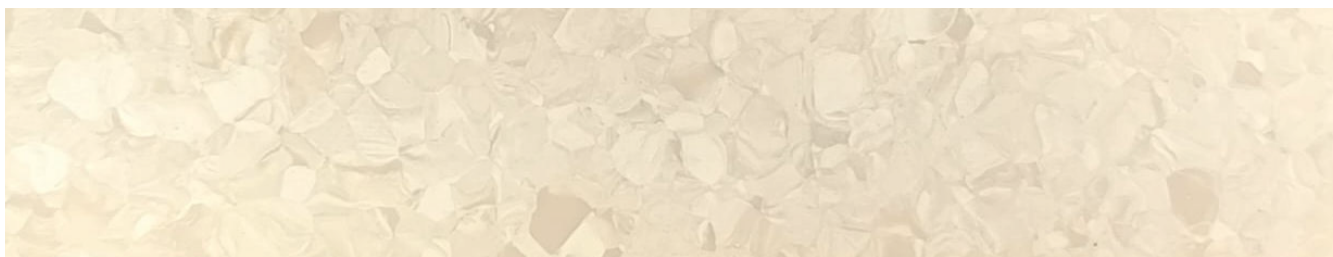

CODE: 440-661

WIDTH: 2,00

THICKNESS: 2mm

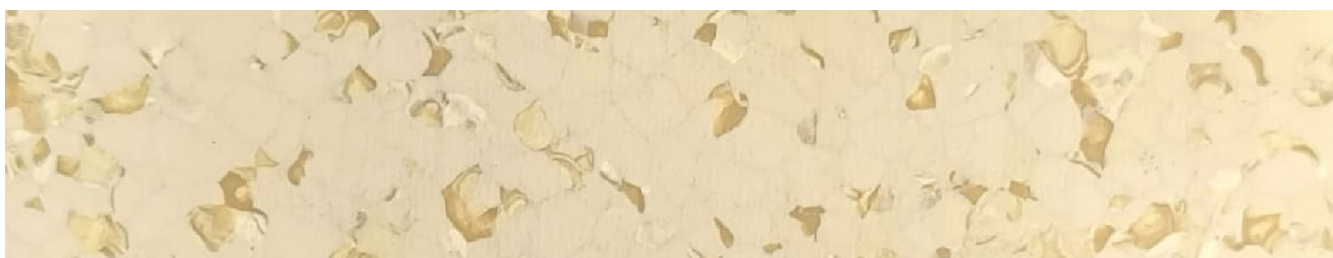

CODE: 310-5324


WIDTH: 2,00

THICKNESS: 2mm



HOMOGENEOUS
VINYL FLOOR COVERINGS
ANTI-STATIC

PVC FLOORING
SIZE: 2m x 20 m

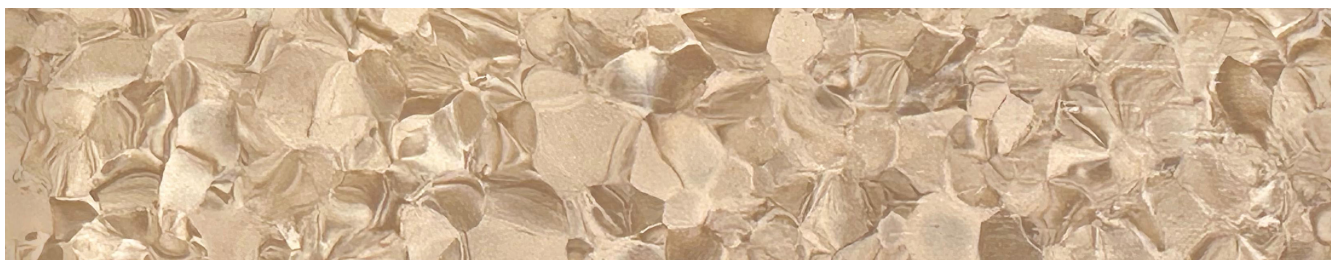


CODE: 440-6613 WIDTH: 2,00 THICKNESS: 2mm



CODE: 440-6629 WIDTH: 2,00 THICKNESS: 2mm



CODE: 440-6625 WIDTH: 2,00 THICKNESS: 2mm

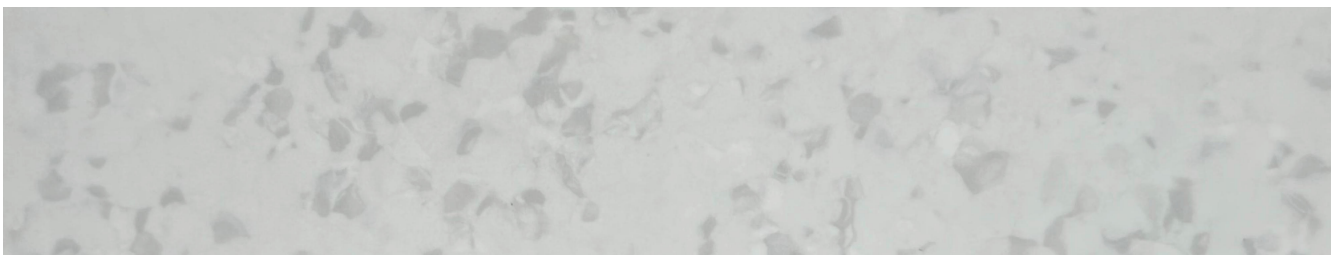

CODE: 330-9008 WIDTH: 2,00 THICKNESS: 2mm



HOMOGENEOUS
VINYL FLOOR COVERINGS
ANTI-STATIC

PVC FLOORING
SIZE: 2m x 20 m



CODE: #####

WIDTH: 2,00

THICKNESS: 2mm



CODE: #####

WIDTH: 2,00

THICKNESS: 2mm



CODE: 449-6621

WIDTH: 2,00

THICKNESS: 2mm

TECHNICAL SPECIFICATION

HOMOGENEOUS VINYL FLOORING / ANTI-STATIC

Product Specification

Type of flooring	EN649	
Classification	ISO 10874 EN685 NTE INEN-ISO 26986	23/34/43
Size	EN426	2m*20m
Thickness	EN428	5mm
Weight	EN430	2.0mm;2850g/m2

Product Performance

Wear Group	EN660	T
Residual Indentation	EN433	0.03mm
Dimensional Stability	EN434	≤0.05%
Resistance to Chemicals	EN423	Very Good
Reaction to Fire	EN13501-1	Bfl-s1
Electrical Behavior	EN1815	≤2kV
Impact Sound Reduction	EN ISO717/20Lw	Approx.+4dB
Color Fastness to Light	EN ISO 105-B02	≥6
Mold Resistance	DIN EN ISO 846-A/C	No Bacterium
Slip Resistance	DIN 51130	R9
Hazardous, Substance, Testing	GB 18586-2001	Good





**STOCK SUJETO A VARIACIÓN.
PRECIOS NO INCLUYEN IVA NI TRANSPORTE.**



@netto.ec



098 117 4861



gerencia@nettocorp.net



<http://www.nettocorp.com>